

SIU34 Rugged COTS Systems

3U OpenVPX Sensor Interface Unit


Configure with up to 12 I/O and Communication Function Modules

The SIU34 is a highly configurable rugged system or subsystem ideally suited to support a multitude of Mil-Aero applications that require high-density I/O, communications, Ethernet switching and processing. The SIU34 leverages NAI's 3U OpenVPX™ boards to deliver off-the-shelf solutions that accelerate deployment of SWaP-optimized systems in air, land and sea applications.

Versatile & Scalable Rugged Architecture for Demanding Embedded System Applications Including: Data Acquisition (DAQ), Fire Control & Targeting System (FCTS), Remote Data Concentrator (RDC), Vehicle Management System (VMS) Data Concentrator Unit (DCU), Remote Interface Unit (RIU), Health and Usage Monitoring System (HUMS), Aircraft Interface Unit (AIU)



Mix-and-Match Modular Architecture

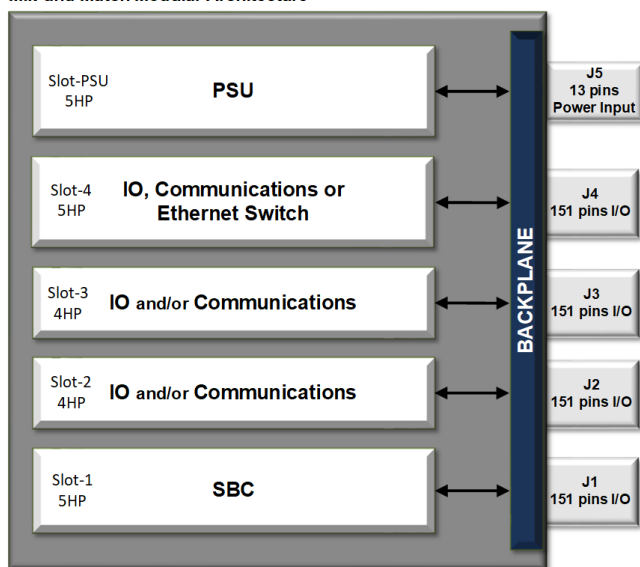

Features

- **4x 3U OpenVPX™ Card Slots**
 - Supports up to 12 I/O and/or Communication smart functions
 - 100+ modules to choose from
- **Local or External SBC Host I/F capable**
 - Processor Options: Freescale PowerPC™ QorlQ® T2080, Intel® Core™ i7, ARM® Cortex® -A9 or ARM® Cortex® -A53
 - SBC-less remote interface supported via Ethernet connection to your mission computer
- **Configurable I/O Communications and Processing**
- **COTS/NDI Sense & Response system**
- **COSA® Architecture**
 - Supports MOSA, OSA, SOSA™ and the FACE™ technical standards
- **Reduced SWaP Footprint**
 - 9.4' x 5.7' x 5.9' (est) (includes connectors)
 - ~8.2 lbs. plus ~2.2 lbs. for PSU and ~1.35 lbs. each additional fully populated board
 - 28 VDC input
 - Power is configuration dependent
 - 50 W typ. (up to 130 W capable)
 - 50 ms (min.) PSU hold-up option
- **Wind River VxWorks®, Xilinx PetaLinux, Microsoft Windows® and DDC-I Deos® OS support**
- **Continuous Background Built-In-Test (BIT) (board/function supported as applicable)**
- **Specifications**
 - Operating temp: -40°C to +71°C @ thermal interface, conduction cooled; Air/convection-cooled version
 - Environmental/EMI
 - MIL-STD-461*
 - MIL-STD-810
 - MIL-STD-1275
 - MIL-STD-704

*MIL-STD-461F requires properly shielded cables and system grounding practices.

Select up to 12 independent functions for your application with up to 4 card slots

| I/O Boards and Single Board Computers | | | | | | |
|---------------------------------------|---|--|--|---|---|--|
| Type | Model | Description | | Type | Model | Description |
| Single Board Computers | 68ARM1 | 3U OpenVPX ARM® Cortex®-A9 Single Board Computer | | High Density I/O Boards | 68DT1 | 3U OpenVPX Multi-channel Discrete I/O Board |
| | 68ARM2 | 3U OpenVPX, Single Board Computer, Xilinx Zynq UltraScale+ Dual-core ARM Cortex-A53 MPCore @ 1.3 GHz | | Multifunction I/O Boards | 68G5 | 3U OpenVPX I/O and Communications Board |
| | 68INT4 | 3U OpenVPX, Single Board Computer, Intel Xeon Quad-core E3-1505LV6 @ 2.2 GHz | | | 68G5E | 3U OpenVPX Ethernet Switch and Multifunction I/O Board |
| | 68INT5 | 3U OpenVPX, Single Board Computer, Intel Xeon six-core E-2276ME @ 2.8 GHz | | | 68G5P | 3U OpenVPX Multifunction I/O Board with External PCIe & SATA II I/F |
| | 68PPC2 | 3U OpenVPX, Single Board Computer, NXP® QorIQ® T2080 Quad-Core e6500 @1.5 GHz | | Rugged Power Supplies | VPX68 | DC/DC 3U 1.0" Pitch VITA 62 Power Converter meets MIL-STD-704A-F |
| High Density I/O Boards | 68CB6 | 3U VPX Combination I/O & Communications Board | | | | |
| Smart Function Module | | | | | | |
| Type | Module Category | | | Type | Module Category | |
| Measurement & Simulation Modules | AC Reference | | | Communication Modules | MIL-STD-1553B | |
| | Chip Detector and Fuzz Burn | | | | MIL-STD-1760 | |
| | LVDT RVDI Measurement and Simulation | | | | Serial Communications | |
| | Strain Gauge Measurement | | | | Time-Triggered Ethernet | |
| | Synchro Resolver Measurement and Simulation | | | I/O Modules | Analog-to-Digital | |
| | Thermocouple and RTD Measurement | | | | Digital IO - Differential Transceiver | |
| | Variable Reluctance | | | | Digital IO - TTL,CMOS | |
| Communication Modules | ARINC Communications | | | | Digital-to-Analog | |
| | CANBus Communications | | | | Discrete IO - Multichannel,Programmable | |
| | Ethernet NIC Interface | | | | Relay | |
| | Ethernet Switch | | | | Combination Modules | MIL-STD-1553B, Discrete IO - Multichannel,Programmable |
| | IEEE 1394 (FireWire) | | | MIL-STD-1553B, ARINC Communications | | |

Architected for Versatility

NAI's Configurable Open Systems Architecture™ (COSA®) offers a choice of over 100 smart I/O, communications, or Ethernet switch functions, providing the highest packaging density and greatest flexibility of ruggedized embedded product solutions in the industry. Preexisting, fully-tested functions can be combined in an unlimited number of ways quickly and easily.

One-Source Efficiencies

Eliminate man-months of integration with a configured, field-proven system from NAI. Specification to deployment is a seamless experience as all design, state-of-the-art manufacturing, assembly and test are performed - by one trusted source. All facilities are located within the U.S. and optimized for high-mix/low volume production runs and extended lifecycle support.

Product Lifecycle Management

From design to production and beyond, NAI's product lifecycle management strategy ensures the long-term availability of COTS products through configuration management, technology refresh and obsolescence component purchase and storage.